



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES



WASTE OIL EQUIPMENTS

GPV 2.0

FEATURES

- **READY TO USE**
- **COMPATIBLE WITH ALL FLUIDS (UNIVERSAL VERSION ONLY)**
- **QUICK RETROFIT INSTALLATION**
- **ADBLUE AND DIESEL VERSIONS NOW AVAILABLE**

The GPV 2.0 is the MCO 2.0 version of the well known PIUSI GPV. It includes a built-in solenoid valve and an oval gear meter, everything in a single device. It is available in several versions based on the fluid you need to control.

PERFORMANCE

UP TO

30 L/MIN

FLOW RATE

± 0,5%

ACCURACY

LAN/WI-FI

CONNECTION SYSTEM



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO44601A	3	6,6	180X180X170	7,1X7,1X6,7	-	1
FOO44600A	3	6,6	180X180X170	7,1X7,1X6,7	-	1
FOO44606A	5,7	12,5	350X180X260	13,8X7,1X10,2	-	1
FOO446030	3	6,6	180X180X170	7,1X7,1X6,7	-	1
FOO446070	4,3	9,5	350X180X260	13,8X7,1X10,2	-	1
FOO446080	4,3	9,5	350X180X260	13,8X7,1X10,2	-	1
FOO446050	3	6,6	180X180X170	7,1X7,1X6,7	-	1



FILTRATION



FLUID MONITORING



TANK MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

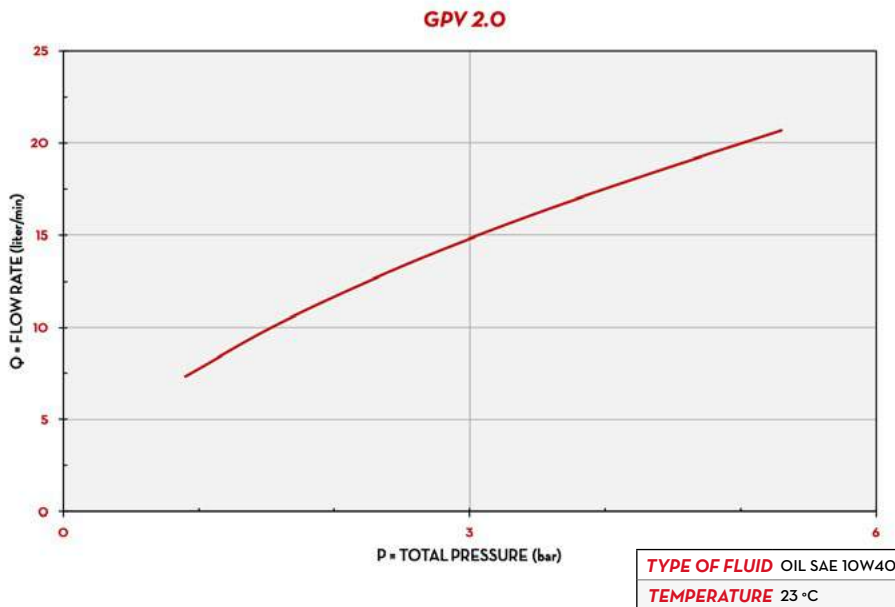

IN THE BOX

- GPV 2.0 UNIT
- INSTRUCTION MANUAL

MATERIALS

- GEARS: TECHNOPOLYMER
- BODY: ALLUMINIUM
- TOPPING: NBR
- VALVE: NBR, NICKEL PLATED STEEL, BRASS



TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE		CONNECTION
			L/MIN	GPM	AC V/HZ	POWER WATT	
FOO44601A	GPV 2.0 - BI VALVE NEW		30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO44600A	GPV 2.0 - SINGLE VALVE NEW		30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO44606A	GPV 2.0 SINGLE VALVE - KIT REMOTE-NEW		30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446030	GPV 2.0 - SINGLE VALVE - WINDSCREEN		30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446070	GPV 2.0 - SINGLE VALVE - ADBLUE		5 - 120	1,3 - 1,6	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446080	GPV 2.0 - SINGLE VALVE - DIESEL		10 - 100	1,3 - 31,6	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446050	GPV2.0-UNIVERSAL VALVE/PULSER CONTROLLER	ANY	-	-	100-240 V/ 50-60 HZ	25	WI-FI / LAN

SHALL BE COMPLETED WITH A SUITABLE VALVE AND PULSER

GPV 2.0